



Yuasa Fiche de données techniques

Yuasa HJ-S46B24R

Performance

Tension	12V
Capacité (20 heures)	45Ah
Performances en démarrage à froid (EN1)	325A

Dimensions

Longueur	238mm
Largeur	129mm
Hauteur	227mm

Poids & Mesures

Poids moyen avec acide	12.7kg
------------------------	--------



Caractéristiques du bac


Type de bac	B24 JIS AGM
Schéma de montage	1
Système de fixation	N
Poignées	✓
Caractéristiques semi-traction	✓
Type de couvercle	VRLA

Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca VRLA
Séparateur	AGM
Vibration	V1 (30Hz/3g/2hr)
Taux de charge recommandé	3A
Performance Marking	W5-C2-V2-E2


Type de bornes

T3
Small Japanese
JIS Terminal



Positive Terminal Negative Terminal

Schéma de montage des éléments

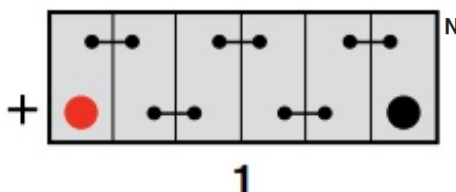

Système de fixation de la batterie



Date de publication: 28/08/2024 - E&OE



Yuasa Technical Data Sheet

Yuasa HJ-S46B24R

Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	325A

Dimensions

Length	238mm
Width	129mm
Height	227mm

Weights & Measures

Mean Weight with Acid	12.7kg
-----------------------	--------



Container Features

Case Type	B24 JIS AGM
Cell Layout	1
Hold Down	N
Handles	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	3A
Performance Marking	W5-C2-V2-E2

Terminal Type

T3


Small Japanese
JIS Terminal



Positive Terminal

Negative Terminal

Cell Assembly Layout

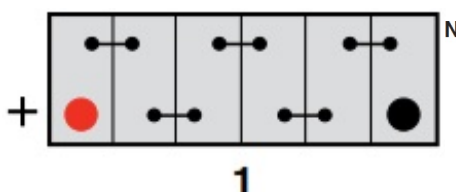

Battery Hold-down



Data Sheet generated on 28/08/2024 – E&OE